REGIONAL DISTRICT OF NANAIMO

REQUEST FOR TENDER No. 23-016

Lee and Hall Road Pump Stations – Platform Upgrades


Addendum 2
Issued: March 3, 2023

Closing Date & Time: on or before 3:00 PM Pacific Time on March 9, 2023

This addendum shall be read in conjunction with and considered as an integral part of the Request for Tender. Revisions supersede the information contained in the original Tender or previously issued Addendum. No consideration will be allowed for any extras due to any Vendor not being familiar with the contents of this Addendum. All other terms and conditions remain the same.

Questions:

Q1) Is it possible to utilize two of B-3 configurations back-to-back versus the B-2 configuration? Or a combination of channel and L Iron to meet the 60.3 landing surface and the strength?

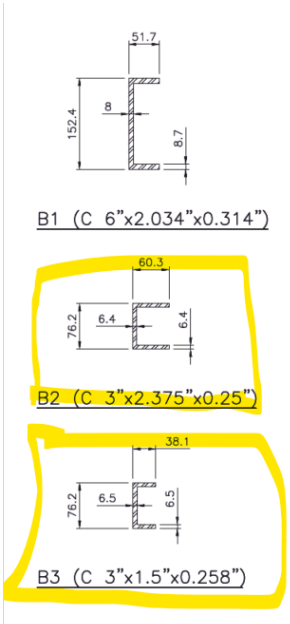

A1) Regarding the substitution for the SS B-2 members, it would be acceptable to substitute two (2) of the SS B-3 members arranged back to back provided that they are welded together at the top and bottom with stitch weld and noting that some slight adjustments will be required to the locations of the mounting plates to which they are attached. Alternately, a bent or fabricated SS B-2 member could be utilized.

End of Addendum 2